

TECHNICAL DATASHEET

Date

2026.01.29

Prepared by

Checked by





Approved by

[Signature]

[Signature]

[Signature]

Type(EN)	DIN C	Created:	2026.01.29
Type(GBC)	GB EFB 73011*(A) / wet charged	Modified:	

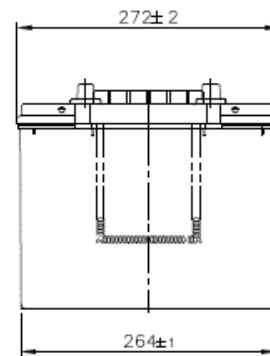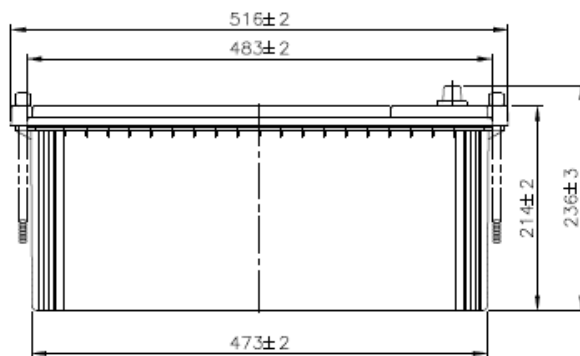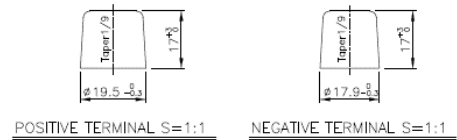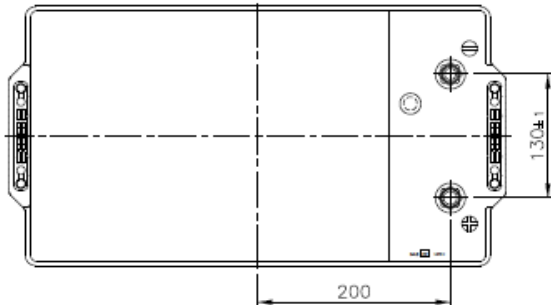

PERFORMANCES			CONTAINER		
Voltage(V):	12	Nominal	Type:	DIN C	Acc. To EN
C ₂₀ (Ah):	230		Hold Down:	BX	
RC(min):	490		H.D.Adapter:	No	
Cold Cranking Ampere(A):	1350	EN	COVER		
Charge Acceptance(A):	23.0		Type:	Double Lid(FL)	
Water Consumption(g/Ah):	low(L)	0.9~1.0	Polarity:	(+, -)	Cell layout
Plates per Cell(pcs):	32		Terminals:	Standard	
Pos./ Grid Alloy:	Pun. / Pb-Ca-Sn		Terminal Adapter:	No	
Neg./ Grid Alloy:	Exp. / Pb-Ca		Magic Eye:	Yes	1 Ball
Separator:	PE(Enveloped)		Degassing system	Yes	
			Flame Arrestor	Yes	2pcs(filter)
			Lateral Plug:	No	
WEIGHT & DIMENSIONS (max.)					
Battery Weight(kg):	58.5	with acid			
Volume acid(L):	14.7	approximately			
Length(mm):	518		PLUGS		
Width(mm):	274		Type:	No	Vent Sealed
Height(mm):	216		HANDLES		
Total Height(mm) :	239		Type:	2x Rope	
			OTHERS		
			Degassing Tube:	No	

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by GBC