

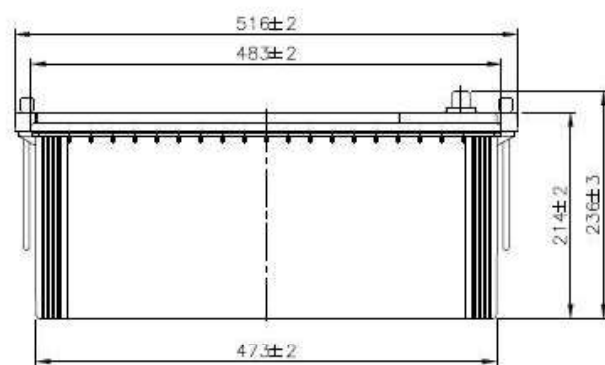
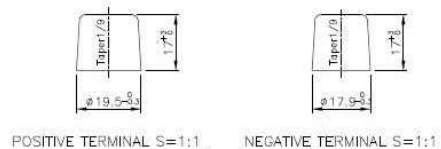


TECHNICAL DATASHEET

Date 2025.12.29

Prepared by	Checked by	Approved by

Type	EN C	Created:	2025.12.29
Type(GBC)	GB 73011SHD-31	Modified:	

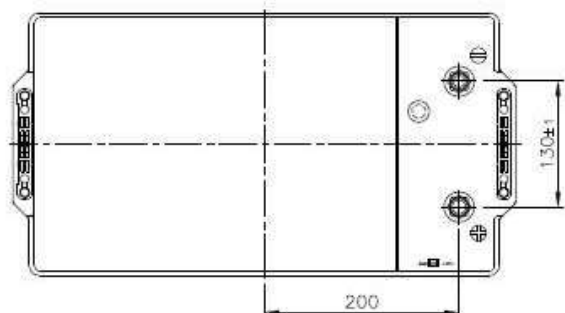

PERFORMANCES			CONTAINER		
Voltage(V):	12	Nominal	Type:	EN C	EN
C ₂₀ (Ah):	235		Hold Down:	No	
RC(min):	440		H.D.Adapter:	No	
Cold Cranking Ampere(A):	1250	EN	COVER		
Charge Acceptance(A):	23.5		Type:	Flat/Sealed Type	
Water Consumption(g/Ah):	LOW(L)	4.0 g/Ah ↓	Polarity:	(+, -)	Cell layout
Plates per Cell(pcs):	31		Terminals:	Standard	
Pos./ Grid Alloy:	Exp. / Pb-Ca-Sn		Terminal Adapter:	No	
Neg./ Grid Alloy:	Exp. / Pb-Ca		Magic Eye:	Yes	
Separator:	PE Enveloping		Degassing system:	Yes	
			Flame Arrestor:	Yes	
			Vent Block Pin:	No	
WEIGHT AND STD.DIMENSIONS					
BatteryWeight(kg):	55.0	with acid			
Length(mm):	518				
Width(mm):	274		PLUGS		
Height(mm):	216		Type:	No	Vent Sealed
Total Height(mm) :	239		HANDLES		
			Type:	2x Rope	
			OTHERS		
			Degassing Tube:	No	

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by GBC